



TDAVIT® SHACKLED

REIDLIFTING.COM

Our TDAVIT is lightweight, portable, and as well as a wide range of standard sizes can be custom-designed and manufactured to specifically meet our customers' individual needs. Truly pioneering, it offers a lifting capacity of up to 600kg and 360° rotation under a full load.

Key features

- › EN795:2012 Certified
- › ATEX Certified
- › Can support goods and personnel lifting;
 - › Goods WLL of up to 600kg
 - › Personnel WLL of up to 300kg
- › Can be operated and assembled by one person, no tools required
- › Can be rotated 360° under a full load
- › Designed with a universal kingpin which is compatible for all REID sockets
- › Clean, anodised finish for increased corrosion resistance
- › A variety of attachments for a range of applications
- › Engineered designs and bespoke sections reduce weight, providing lightweight portability

Configurations

The TDAVIT is available in a range of configurations and can be customised in line with specific requirements (subject to WLL rating).

**Refer to REID for further guidance



600KG
WLL



1 PERSON
ASSEMBLY



CUSTOMISED
& BAGGED



EN795
CERTIFIED



ATEX
CERTIFIED

Features & Performance

	BEAM 0	BEAM 1	BEAM 2	BEAM 3	BEAM 4
Accreditations, Certifications & Standards					
EN795:2012	✓	✓	✓	✓	×
AS/NZS 5532:2013	✓	✓	✓	✓	×
ATEX Certified [Zone 2]	✓	✓	✓	✓	✓
ATEX Certified [Zone 1]	Optional	Optional	Optional	Optional	Optional
IRATA	✓	✓	✓	✓	×
Capacity					
Maximum Goods Lifting [kg]	600	500	500	375	300
Maximum Personnel Lifting [kg]	300	250	250	150	×
Fall Arrest [Persons]	1	1	1	1	×
Dimensions					
Maximum Reach [mm]	650	850	1050	1450	1850
Maximum Height of Lift [mm]	2115	2290	2365	2510	2665
Socket Diameter					
65mm	✓	✓	✓	✓	✓
Socket Options					
Top Mount	✓	✓	✓	✓	✓
Flush Mount	✓	✓	✓	✓	✓
Side Mount	✓	✓	✓	✓	✓
Bridge Mount	✓	✓	✓	✓	✓
Pedestal	✓	✓	✓	✓	✓
Extension Post	✓	✓	✓	✓	✓
Standard Features					
Shackle Lifting points	✓	✓	✓	✓	✓
Component Weight < 25kg	✓	✓	✓	✓	✓
Optional Extras					
Winch Capable	✓	✓	✓	✓	✓
Rotational Handle	✓	✓	✓	✓	✓
Finishes					
Anodised	✓	✓	✓	✓	✓
316SS Fixings	Optional	Optional	Optional	Optional	Optional
Marine Spec	Optional	Optional	Optional	Optional	Optional


Dimensions in the table are approximate values. For more accurate details please refer to the Dimension Table.

All line items marked with a '✓' come as standard. All line items marked with a 'X' are not available.

All line items marked with 'optional' are available as an option and may incur additional costs.

TDAVIT® SHACKLED

- A** Radius | Position A
- B** Radius | Position B
- C** Height of Lift | Position A
- D** Height of Lift | Position B
- P1** Height of Pin Position 1
- P2** Height of Pin Position 2

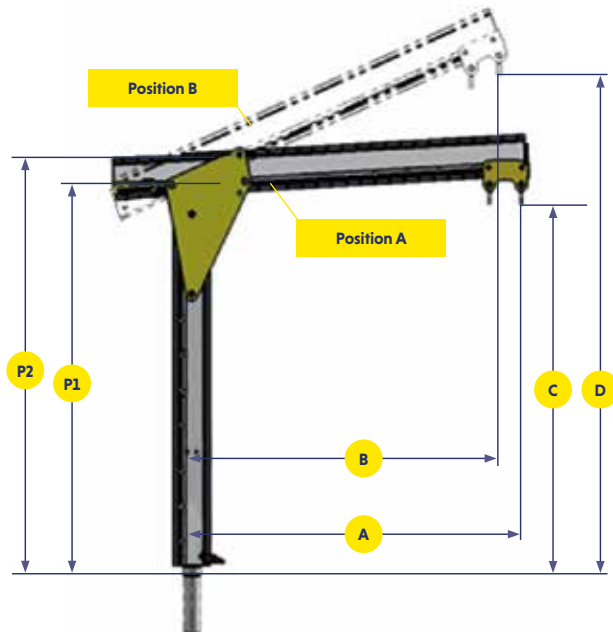

Product Code	Description
TDSA1A0TD2	T-Davit Type S Column option 1 Beam option 0 WLL 600kg
TDSA1A1TD2	T-Davit Type S Column option 1 Beam option 1 WLL 500kg
TDSA1A2TD2	T-Davit Type S Column option 1 Beam option 2 WLL 500kg
TDSA1A3TD2	T-Davit Type S Column option 1 Beam option 3 WLL 375kg
TDSA1A4TD2	T-Davit Type S Column option 1 Beam option 4 WLL 300kg
TDSA2A0TD2	T-Davit Type S Column option 2 Beam option 0 WLL 600kg
TDSA2A1TD2	T-Davit Type S Column option 2 Beam option 1 WLL 500kg
TDSA2A2TD2	T-Davit Type S Column option 2 Beam option 2 WLL 500kg
TDSA2A3TD2	T-Davit Type S Column option 2 Beam option 3 WLL 375kg
TDSA2A4TD2	T-Davit Type S Column option 2 Beam option 4 WLL 300kg
TDSA3A0TD2	T-Davit Type S Column option 3 Beam option 0 WLL 600kg
TDSA3A1TD2	T-Davit Type S Column option 3 Beam option 1 WLL 500kg
TDSA3A2TD2	T-Davit Type S Column option 3 Beam option 2 WLL 500kg
TDSA3A3TD2	T-Davit Type S Column option 3 Beam option 3 WLL 375kg
TDSA3A4TD2	T-Davit Type S Column option 3 Beam option 4 WLL 300kg
TDSA4A0TD2	T-Davit Type S Column option 4 Beam option 0 WLL 600kg
TDSA4A1TD2	T-Davit Type S Column option 4 Beam option 1 WLL 500kg
TDSA4A2TD2	T-Davit Type S Column option 4 Beam option 2 WLL 500kg
TDSA4A3TD2	T-Davit Type S Column option 4 Beam option 3 WLL 375kg
TDSA4A4TD2	T-Davit Type S Column option 4 Beam option 4 WLL 300kg
TDSA5A0TD2	T-Davit Type S Column option 5 Beam option 0 WLL 600kg
TDSA5A1TD2	T-Davit Type S Column option 5 Beam option 1 WLL 500kg
TDSA5A2TD2	T-Davit Type S Column option 5 Beam option 2 WLL 500kg
TDSA5A3TD2	T-Davit Type S Column option 5 Beam option 3 WLL 375kg
TDSA5A4TD2	T-Davit Type S Column option 5 Beam option 4 WLL 300kg

➤ How To Specify A TDAVIT

Select a beam option from the table based on the radius you require. Each TDAVIT has two radius options A or B which is determined by the beam position [refer to the dimensional drawing on page 3].

Be aware that larger radius beams reduce the working load limit of the TDAVIT.

Select your column option from the dimensional table based on the height of lift you require. Column option 1 is our shortest standard column and option 5 is our tallest.

Should you need a greater height of lift, you can add a pedestal or socket extension, subject to restrictions [see socket overview for further information].

For our standard TDAVIT product codes refer to the product code list on page 3 for any custom requests please contact your REID representative.

To request a quote and any additional information on sockets or accessories such as winches and chain hoists, contact your local reseller or your REID representative.

TDS/DS/EN/AV5/09/2021

Beam Option	0		1		2		3		4				
Dimension	A	B	A	B	A	B	A	B	A	B			
Radius [mm]*	650	590	850	775	1050	960	1450	1335	1850	1705			
WLL [kg]	600		500		500		375		300				
Weight [kg]	9		10		11		14		17				
Dimension	C	D	C	D	C	D	C	D	C	D	Weight [kg]	P1	P2
1	880	1100	890	1175	900	1250	920	1395	940	1550	20	980	1080
2	1060	1280	1070	1355	1080	1430	1100	1575	1120	1730	21	1165	1265
3	1370	1590	1380	1665	1390	1740	1410	1885	1430	2040	23	1475	1575
4	1685	1905	1695	1980	1705	2055	1725	2200	1745	2355	25	1790	1890
5	1995	2215	2005	2290	2015	2365	2035	2510	2055	2665	28	2100	2200

Column Option

*Radii achieved at = 75% WLL

All information herein is copyright protected by REID Lifting Ltd. All company and product names are Trade Mark and Trade Name protected and all REID Product IPR is protected under Patents, Patents Pending and/or Design Rights.



Printed using environment friendly processes and materials.

REID Lifting

Unit 1 Wyeview,
Newhouse Farm Ind. Estate
Chepstow, Monmouthshire
NP16 6UD UK

- +44 (0)1291 620 796
- +44 (0)1291 626 490 (Fax)
- enquiries@reidlifting.com
- www.reidlifting.com